


OPENING	LENGTH (L)	GATE POSTS (G)	BAYS	OVERHANG
I/S POST FACE TO I/S POST FACE	O/S DIM OF GATE LEAF	O/S POST FACE TO O/S POST FACE	NUMBER OF BAYS WITH CHAIN LINK	NUMBER OF BAYS WITHOUT CHAIN LINK
31'-0"	44'-0"	13'-0"	(5) FIVE	(2) TWO
32'-0"	45'-6"	13'-0"	(5) FIVE	(2) TWO
33'-0"	47'-0"	13'-6"	(5) FIVE	(2) TWO
34'-0"	48'-0"	14'-0"	(6) SIX	(2) TWO
35'-0"	49'-6"	14'-0"	(6) SIX	(2) TWO
36'-0"	51'-0"	15'-0"	(6) SIX	(3) THREE
37'-0"	52'-6"	15'-6"	(6) SIX	(3) THREE
38'-0"	54'-0"	15'-6"	(6) SIX	(3) THREE
39'-0"	55'-6"	16'-0"	(7) SEVEN	(3) THREE
40'-0"	56'-6"	16'-0"	(7) SEVEN	(3) THREE
41'-0"	58'-0"	16'-6"	(8) EIGHT	(3) THREE
42'-0"	59'-0"	17'-0"	(8) EIGHT	(3) THREE
43'-0"	60'-8"	17'-0"	(8) EIGHT	(3) THREE
44'-0"	62'-0"	17'-6"	(8) EIGHT	(3) THREE
45'-0"	63'-6"	18'-0"	(9) NINE	(4) FOUR
46'-0"	65'-0"	18'-6"	(9) NINE	(4) FOUR
47'-0"	66'-6"	19'-0"	(9) NINE	(4) FOUR
48'-0"	67'-6"	19'-0"	(9) NINE	(4) FOUR
49'-0"	69'-0"	19'-6"	(10) TEN	(4) FOUR
50'-0"	70'-6"	20'-0"	(10) TEN	(4) FOUR

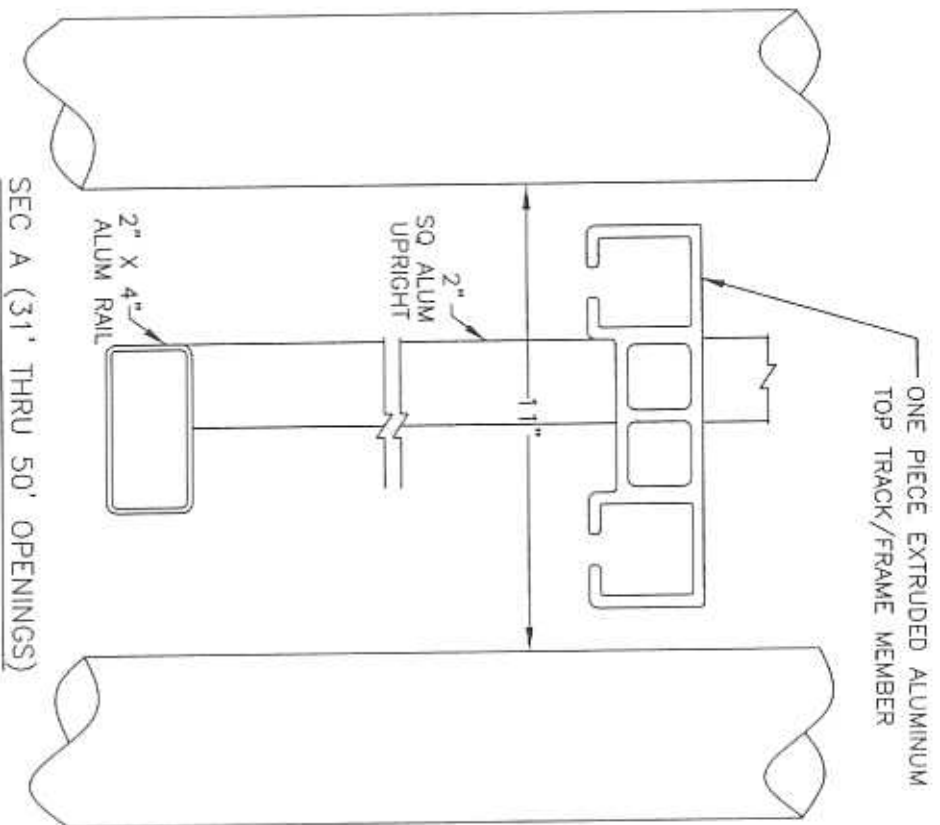

International Gate Devices

800-557-GATE (4283)

BACK-TO-BACK CANTILEVERED SLIDING GATE

ROUND POSTS, W/ BARBED WIRE

DWG:

DT#2

BY:

DATE: